

300W convection / 400W fan cooled, AC-DC power supply

Features	Benefits
• Convection cooled	Silent operation
• Reinforced isolation	Simplifies equipment design
• Full digital control	Improves Product Performance
• ErP and Climate Savers Gold Level	Minimises heat in system
• 5 Year Warranty	Low cost of ownership



Input			
Input Voltage	85-264Vac (100-240Vac nominal)	Input Frequency	47 - 63Hz (440Hz with reduced PFC - consult sales office)
Input Harmonics	EN61000-3-2 compliant	Power Factor	0.79 minimum
Input Fuse	Dual fuses (Live + Neutral) Fast acting (not user accessible)	Inrush Current	<25A at 25°C and 230Vac (cold start) (meets EN61000-3-3).
Earth Leakage Current	140µA at 120Vac (60Hz), 280µA max at 240Vac (60Hz) Worst case leakage current is less than 300µA at 240Vac, 63Hz (normal condition, 0.5mA Single Fault Condition) Touch Current is <100µA NC, <500µA SFC at 264Vac, 60Hz		

Quick Selector (Standard models). Additional variants available - see below							
Output		Convection cooled units / units without fan				Units with top fan	
Volts	Current (fan/convection)	U-Chassis		Cover + Chassis		Cover + Chassis	
		Description	Order Code	Description	Order Code	Description	Order Code
12V	33.3A / 25A	CFE400M-12-5C-N1UML-NT	U7Y0032	CFE400M-12-5C-N1CML-NT	U7Y0087	CFE400M-12-5C-TFCML-NT	U7Y0098
24V	16.7A / 12.5A	CFE400M-24-5C-N1UML-NT	U7Y0054	CFE400M-24-5C-N1CML-NT	U7Y0101	CFE400M-24-5C-TFCML-NT	U7Y0112
48V	8.3A / 6.25A	CFE400M-48-5C-N1UML-NT	U7Y0123	CFE400M-48-5C-N1CML-NT	U7Y0134	CFE400M-48-5C-TFCML-NT	U7Y0145

How To Create A Product Description

Output	Adjustment range	Fan Option			Other Options				
12	10.8 - 14.4 V	-NN	No fan, no fan supply	M = Molex	-Y = ORing FET included -N = ORing FET not included	Input Connector	Earth Leakage	ORing FET	Remote On/Off
24	21.6 - 28.8 V	-N1	No fan, 12V / 0.25A fan supply						
48	43.2 - 50 V	-TF	Top fan, no additional fan supply (needs 'C' cover')						

Adjustable by potentiometer

Standby Supply
 NN = None (only with 'N' remote on/off)
 5C = 5V / 80mA (0.5W standby mode power)
 5H = 5V / 2A (1W standby mode power)

U = Chassis only
 C = Chassis + cover (also for 'TF' fan)

L = 300µA

N = none
 E = Enable
 T = Inhibit


Confirm availability of created product with sales office

Isolation			
Input to Output	Reinforced	2 x MOPPs (3rd edition 60601) 4kVac, 5.7kVdc type tested to 4kVac (equivalent to 5.7kVdc), production tested to 4.3kVdc.	
Input to Earth	Basic	1.5kVac, 2.3kVdc	Output to Earth 1.5kVac

Output Specification		
	Fan cooled Convection	
Output Power	400W 300W	Continuous (including fan supply) or RMS (including Peak power) See handbook for details.
Peak Power	450W 450W	for 10 seconds. RMS power not to exceed Output Power stated above
Total Regulation	better than 2.25%	Including Line regulation of 0.25% (for 90-264Vac input change), Load regulation of 1% (for 0-100% load change) and thermal regulation of 0.02%/°C (0-50°C)
Ripple & Noise	1%	pk-pk, using EIAJ test method & 20MHz bandwidth
Voltage Setting Accuracy	±1%	at 50% load
Turn on Time	1.5s max	at 90 Vac & 100% rated output power
Efficiency	up to 94%	for 48V and 24V (up to 91% for 12V). At 230Vac, 75% load
Hold up	13ms	minimum at 100% of 400W load
Min Load	None	
Transient Response	<5%	of set voltage for 50% of 300W load change (in 500µs within the range 25 - 100% load)
Recovery	2ms typical	for recovery to 2% of set voltage
Short circuit protection	Yes	Auto recovery after removal of short circuit
Over Temperature protection	Yes	Primary - auto recovers, secondary - cycle power to restart
Over Voltage Protection	Yes	Latching, need to cycle ac to restart unit.
Fan supply	12V / 0.25A	Depending on 'Fan Option' selected. See 'how to create a product description' for details
Parallel connection	Possible	For N+1 redundancy with ORing FET option. To increase output power requires optional droop share (contact sales office for details)

Global Signals	
Remote on/off	Enable - TTL logic level low (relative to Standby 0V) enables channel 1 and fan supply Inhibit - TTL logic level low (relative to Standby 0V) inhibits channel 1 and fan supply
Standby Supply	5V / 80mA or 5V / 2A, isolated supply, not affected by remote on/off.
Power Good	Logic high indicates ac supply is good and Ch1 is within regulation. Not available on units with no standby supply.
ORing FET	Allows redundant connection of power supplies with no additional/external diodes required.

Environment	
Temperature	See derating chart. Fan cooled is with 1.5m/s air blown from input to output (approximately 12CFM) -40°C to 70°C storage (max 12 months). Fan cooling required if the unit is mounted with no free air circulation above (see handbook for mounting details)
Low Temp Startup	-20°C
Humidity	5 - 95% RH non condensing
Shock	±3 x 30g shocks in each plane, total 18 shocks 30g shock = 11ms (+/-0.5msec), half sine Conforms to EN60068-2-27, EN60068-2-47, IEC68-2-27, IEC68-2-47, JIS C0041-1987. Conforms to MIL-STD-810E/F, Method 516.5, Pro I, IV, VI
Vibration	Single axis 10 - 500 Hz at 2g (sweep and endurance at resonance) in all 3 planes Conforms to EN60068-2-6, IEC68-2-6 Conforms to MIL-STD-810E, Method 514.4, Pro I, Cat 1,9
Altitude	Medical approval = -200 to 5000 metres operational (-200 to 3000m for 2nd edition 60601) Non medical approval = -200 to 5000 metres operational -200 to 5000m storage/transportation
Pollution	Degree 2, Material group IIIb

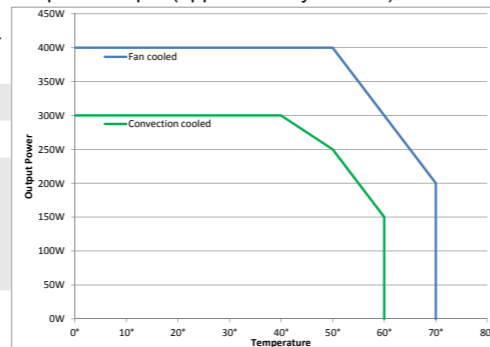

Emissions EN61000-6-3:2007, EN60601-1-2:2007		
Radiated Electric Field	EN55011, EN55022	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B see application note for details
Conducted Emissions	EN55011, EN55022	(as per CISPR.11/22) Class B, FCC47 part 15 subpart B
Conducted Harmonics	EN61000-3-2	Class A
Flicker	EN61000-3-3	Compliant - d _{max} only

Immunity EN61000-6-2:2005				Criteria
Electrostatic Discharge	EN61000-4-2	Level 4	Level 3 for Fan supply Not applicable to open frame units	A
Electromagnetic Field	EN61000-4-3	Level 3		A
Fast / Burst Transient	EN61000-4-4	Level 4		A
Surge Immunity	EN61000-4-5	Level 3		A
Conducted RF Immunity	EN61000-4-6	Level 3		A
Power Frequency Magnetic Field	EN61000-4-8	Level 3		A
Voltage Dips, Variations, Interruptions	EN61000-4-11	Class 3	Criteria B for 5 sec interruption Criteria B for 1 cycle interruption Criteria B for dip to 40% for 5 cycles below 154Vac (300W convection) or 176Vac (400W forced air cooled)	A
Ring Wave	EN61000-4-12	Level 3		A
Voltage Fluctuations	EN61000-4-14	Class 3		A

Approvals / Accreditations	
IEC/EN 60950-1, UL60950-1 / CSA 22.2 No 60950-1	File E135494
IEC/EN 60601-1, UL/CSA 60601-1, ANSI/AAMI ES60601-1 CAN/CSA-C22.2 No 60601-1-08	File E349607
IEC/EN 61010-1 (designed to meet)	
CE Mark (EN60950-1)	LV Directive 2006/95/EC
CB certificate and Report available on request	Please check with technical sales for status of approvals
Designed and manufactured under the control of ISO9001 and ISO13485 (including risk management).	

Outline & Connection Drawings

MATING PARTS			
CONNECTOR	HOUSING	CRIMP PIN	MANUFACTURER
J1	09-50-8051	08-52-0113	MOLEX
J2	22-01-2085	0850-0032	MOLEX
J5 & J6	N/A	TAG 19073-0185	MOLEX

NOTE:
A 6 OFF FIXING HOLES FOR M3, MAXIMUM PENETRATION 3.3mm,
MAXIMUM TORQUE 0.9Nm.
ALL TOLERANCES +/-0.5mm.

All specifications at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.



TDK-Lambda France SAS

ZAC des Delaches
CS 41077
9 rue Thuillere
91978 Villebon Courtaboeuf
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@tdk-lambda.nl
www.tdk-lambda.nl



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com




Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Switzerland Sales Office

Bahnhofstrasse 50
8305 Dietlikon
Switzerland
Tel: +41 44 850 53 53
Fax: +41 44 850 53 50
info@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



C.I.S.

Commercial Support:
Tel: +7 (495) 665 2627
Technical Support:
Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.tdk-lambda.ru

Local Distribution

